


4/8/16CH H.264 MULTIPLEX DVR

Features

- H.264 compression for DVR recording and web transmission
- Graphic OSD and mouse control(PS/2)
- Live display, record, backup, playback and network access at the same time
- DVD writer (optional) and USB device backup
- Remote view and manage through 16CH client software and IE browser
- 1 channel audio recording and playback
- Motion detection with area selecting and sensitivity adjusting by each camera
- Remote controller support
- Email notification while event is happening
- Control all functions of PTZ camera
- TCP/IP, DHCP, DDNS, Dynamic IP network protocol
- System auto recovery after power reconnected
- Digital watermark proof
- Manual / event / schedule recording
- Multi-language OSD: English / Polish / Spanish / Russian / French / Turkish / German / Italian / Portuguese / Chinese

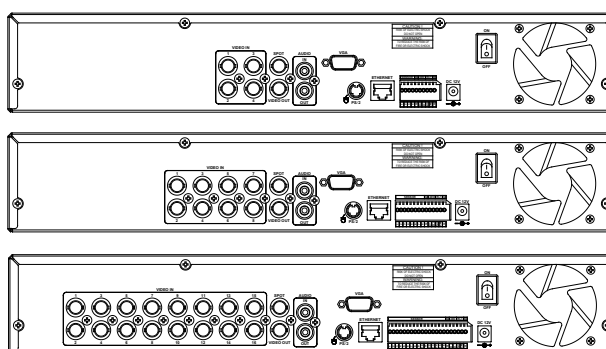

Model No.		RYK-9254	RYK-9258	RYK-9256	
Video	Video System				
	Input	4ch Bnc	8ch Bnc	16ch Bnc	
	Loop		-		
	Video Output	Composite Video And Vga			
Audio	Sopt Output		1ch Bnc		
	Input		1ch Rca		
Audio	Output		1ch Rca		
	Sensor				
Sensor	Input	4ch Alarm Input	8ch Alarm Input	16ch Alarm Input	
	Output		1ch Relay Output		
Storage	Device	2 Sata Hard Disks (7,200rpm, 45mhz Dma, Max. 1tb)			
	Cd/Dvd Writer	Option			
Display	Division	1,4	1,4,6,7,9	1,4,6,7,9,10,13,16	
	Zoom		2x		
	Osd	Graphic Osd			
Recording	Compression	H.264			
	Resolution	720x480, 720x240, 360x240 (Ntsc) 720x576, 720x288, 360x288 (Pal)			
	Framerate				
		Ntsc	60, 120, 120fps	60, 120, 240fps	60, 120, 240fps
		Pal	50, 100, 100fps	50, 100, 200fps	50, 100, 200fps
	Quality	Fine / Normal / Low			
	Record Mode	Manual, Motion Detection, Sensor, Video Loss			
Control	Watermark	Yes			
	Motion Detection	User Selectable Motion Detection Area For Each Camera Individually Sensitivity: 5 Levels			
	Alarm	Pre	0~5 Sec		
		Post	0~60 Sec		
	Remote Controller	Yes			
Ptz Camera	Yes				
Playback	Search Mode	Calendar, Time, Event, Block, File, Bookmark			
	Speed	NormAl, Rew&Ff [2x/4x/8x/16x/32x/64x/128x], Picture To Picture, Pause			
	Device	Internal Hdd / External Devices Through Usb Interface			
	Backup File	H.264 Compression And Avi Format (Converted By Client Viewer)			
Network	Compression	H.264			
	Network Interface	16ch Client Viewer, Web Browser			
	Frame Rate	120 Frames Per Second			
	Service	Tcp/Ip, SmtP, Http, Dhcp, Ddns			
Backup	Web Browser	Internet Explorer 7.0 Or Higher			
	Internal	Cd-R/Rw, Dvd±Rw, Dvd Ram			
	External	Usb Hdd, Usb Cd/Dvd Writer, Usb Memory Stick And Network Backup			
System Log	Mode	Power Fail, Power And RecorD On/Off, Menu Change, Network Connection			
	Log Numbers	20,000 Records			
Monitoring	Software Watchdog				
Recovery	Auto-Reboot By Watchdog				
Firmware Upgrade	Usb 2.0 Port (1 Port At Front Panel), Network				
Power Source	Dc12v 6.67a				
Power Consumption	Appx. 80w				